AWIS	FIA	CTAF	PAL	Bearings are Magnetic Elevations in FEET AMSL
134.55	**BN CEN 124.8**	**128.0**	**128.0**	

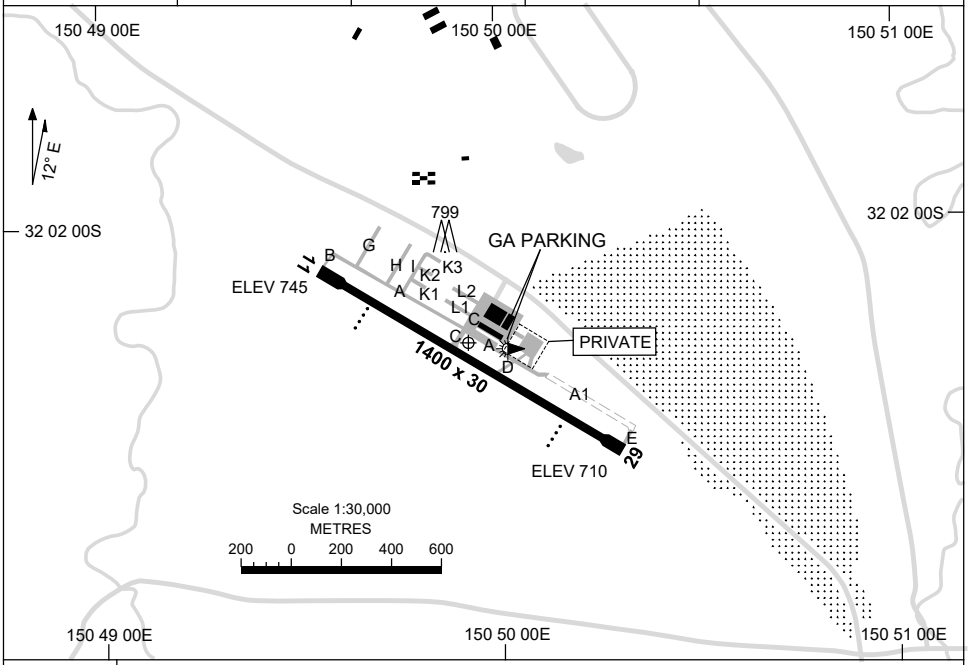

RWY	AERODROME LIGHTING
	TAXIWAY : BLUE EDGE ON TWY C RL : PAL 128.0
11 *110*	LIRL PAPI RIGHT SIDE 3.0° 45FT
290 **29**	LIRL PAPI LEFT SIDE 3.0° 46FT

NOTES

1. **CAUTION:** THE PILOT IN COMMAND SHOULD BE AWARE OF THE TERRAIN AND OBSTACLES IN THE CIRCLING AREA PRIOR TO CONDUCTING NIGHT IFR OPERATIONS INTO SCONE.
2. AWIS RQ 1 SEC TRANSMIT PULSES TO ACTIVATE.
3. FIA FREQ 124.8 AVBL 4000FT.
4. PAL RQ THREE ONE SECOND PULSES TO ACTIVATE.

Changes: NDB DCMSD, Editorial.

© Airservices Australia

airservices australia