AWIS	FIA	CTAF+AFRU/UNICOM	AFRU+PAL		Bearings are Magnetic Elevations in FEET AMSL
212	ML CEN 122.4	118.8	123.9		



10 NM MSA 2800

REFERENCE WAYPOINT SHT NDB



AD ELEV 375

MNG TO SHT

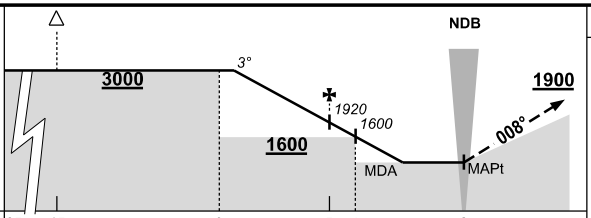

MISSED APPROACH:

TRACK 008°.
CLIMB TO 1900ft.

CIRCLING MINIMA	A,B: 1060-2.4	C: N/A	D: N/A

NM TO SHT NDB	8.4	8	7	6	5	4	3	2.3
ALT (3° APCH PATH)	3000	2870	2560	2240	1920	1600	1280	1060

SECTOR A

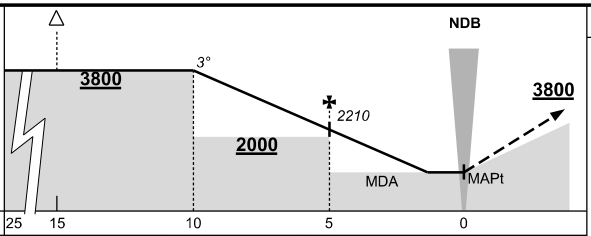

MISSED APPROACH:

CLIMB ON TRACK
TO 3800ft.

CIRCLING MINIMA	A,B: 1060-2.4	C: N/A	D: N/A

NM TO SHT NDB	10	9	8	7	6	5	4	3	2	1.4
ALT (3° APCH PATH)	3800	3480	3160	2840	2530	2210	1890	1570	1250	1060

Changes: PAL DELETED, AFRU+PAL.

© Airservices Australia

airservices australia