

RNP RWY 31
SNAKE BAY, NT (YSNK)

The map displays the YSNK ARP area with various flight paths and holding patterns. Key features include:

- Navigation Aids:** FIA BN CEN 118.15, CTAF 126.5, and PAL 126.5 are listed at the top.
- Flight Paths:** A series of paths are shown with bearings and distances: 100° (dashed), 308° 5NM, 308° 5NM, 308° 5NM, 238° 5NM, 018° 5NM, and 308° 5NM.
- Holding Patterns:** Holding at SK2SB is shown with a diagram indicating bearings of 128°, 238°, and 058°.
- Map Details:** The map includes a scale of 1:500,000, a north arrow, and a 2° E magnetic variation indicator. The area is bounded by coordinates 11 20 00S to 11 40 00S and 130 40 00E to 130 50 00E.
- Obstacles:** Obstacles are marked with dots and numbers: 223, 328, 259, 394, and 1700 (within a 25 NM MSA).
- Table:** A table in the bottom right corner provides information about the holding pattern:


TR	INTURN	TIME	MIN ALT	DME LMT
308°	Right	1	2000	

AD ELEV 173
Bearings are Magnetic
Elevations in FEET AMSL

NM TO NEXT WPT	SK2SM	1.3	2	3	4	SK2SF	0.3							
ALT (3° APCH PATH)		720	940	1260	1580	1900	2000							

MISSED APPROACH:

TRACK DCT TO SK2SH,
THEN TURN RIGHT,
TRACK 100°.
CLIMB TO 1700ft.

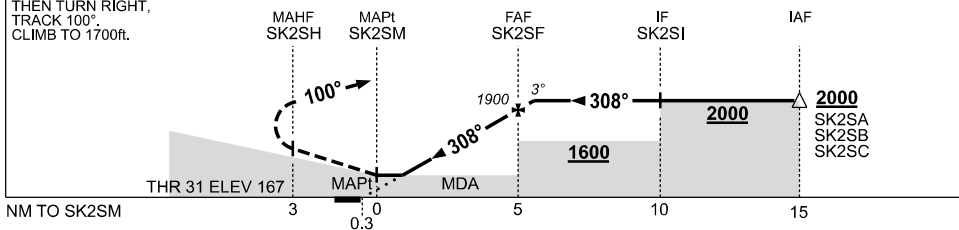

NOTES

CATEGORY	A	B	C	D
LNAV	720 (547-3.1)			NOT APPLICABLE
CIRCLING	770 (597-2.4)		890 (717-4.0)	
ALTERNATE	(1097-4.4)		(1217-6.0)	

1. MAX IAS:
INITIAL : 210KT.

Changes: LNAV MINIMA, DIST-ALT TABLE, WPT NAMING CONVENTION, MAG VAR.

SNKGN01-185