# STANDARD INSTRUMENT ARRIVAL (STAR)
## RWY 05 UNTAV ONE BRAVO ARRIVAL (RNAV)
## SYDNEY/NANCY-BIRD WALTON, NSW (YSWS)

| ATIS | APP | TWR | SMC | Bearings are Magnetic Elevations in FEET AMSL |
|---|---|---|---|---|
| 127.0 | 119.35 | 128.1 | 124.05 | |

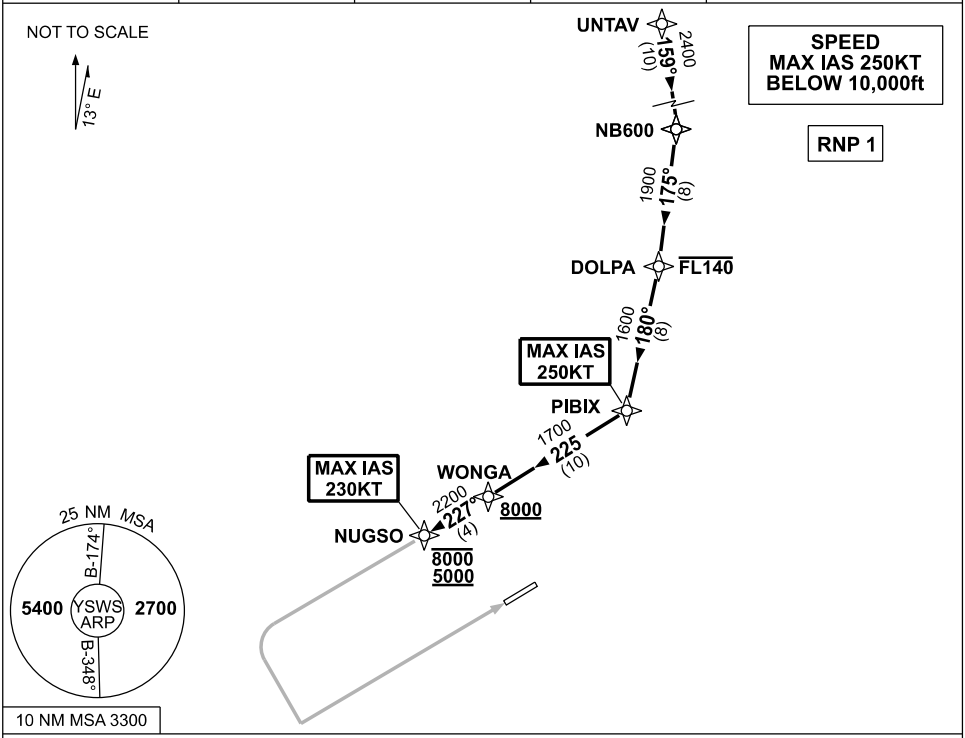


**ARRIVAL: UNTAV ONE BRAVO**

**RWY 05:**

- From UNTAV, track 159° to NB600
- Turn RIGHT, track 175° to DOLPA
  **Cross** DOLPA AT or BLW FL140
- Turn RIGHT, track 180° to PIBIX
  MAX IAS 250KT AT PIBIX
- Turn RIGHT, track 225° to WONGA
  **Cross** WONGA AT or ABV 8000ft
- Turn RIGHT, track 227° to NUGSO for ILS, RNP X (AR), RNP Z or LOC RWY 05 approach.
  **Cross** NUGSO BTN 5000ft and 8000ft
  MAX IAS 230KT AT NUGSO

**COMMUNICATIONS FAILURE: PROCEDURE IN IMC**
**IF ABLE CTC SY APP +61 2 9556 6515**

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

Changes: NEW PROCEDURE.



© Airservices Australia

airservices australia