09 JUL 2026

SYDNEY/NANCY-BIRD WALTON, NSW (YSWS)

ATIS	APP	TWR	SMC	Bearings are Magnetic Elevations in FEET AMSL
127.0	119.35	128.1	124.05	

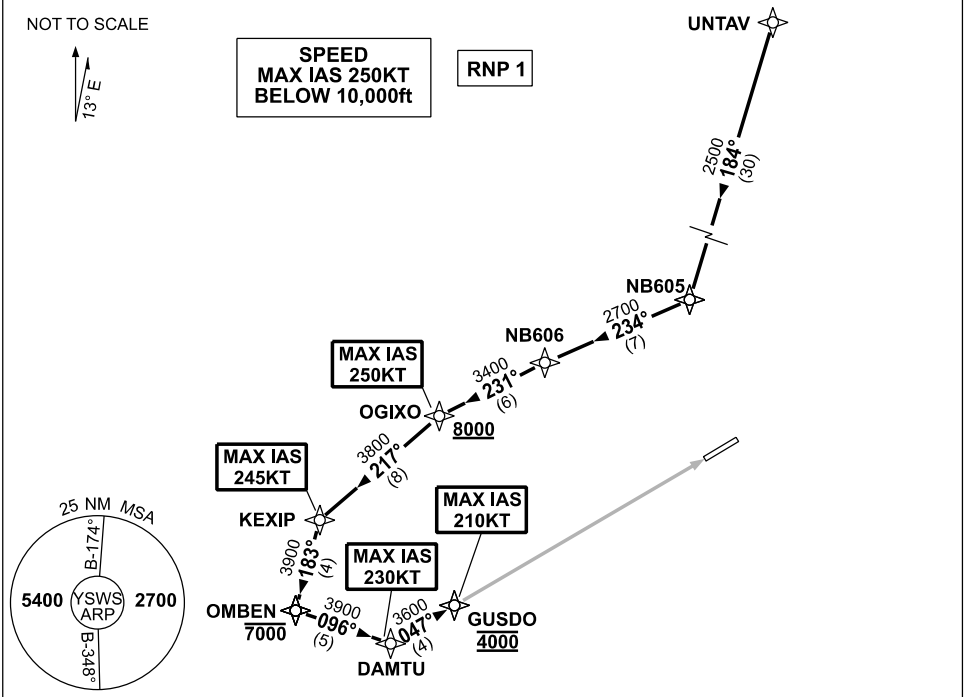

ARRIVAL: UNTAV ONE QUEBEC

RWY 05:

- From UNTAV, track 184° to NB605
- Turn RIGHT, track 234° to NB606
- Turn LEFT, track 231° to OGIXO
  Cross OGIXO AT or ABV 8000ft
  MAX IAS 250KT AT OGIXO
- Turn LEFT, track 217° to KEXIP
  MAX IAS 245KT AT KEXIP
- Turn LEFT, track 183° to OMBEN
  Cross OMBEN AT or BLW 7000ft
- Turn LEFT, track 096° to DAMTU
  MAX IAS 230KT AT DAMTU
- Turn LEFT, track 047° to GUSDO for ILS, RNP Z or LOC RWY 05 approach.
  Cross GUSDO AT 4000ft
  MAX IAS 210KT AT GUSDO

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CTC SY APP +61 2 9556 6515

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

Changes: NEW PROCEDURE.

SWSSR06-187

© Airservices Australia

airservices australia