

KING ISLAND**ELEV 132****AVFAX CODE 7013**

TAS

UTC +10

YKII

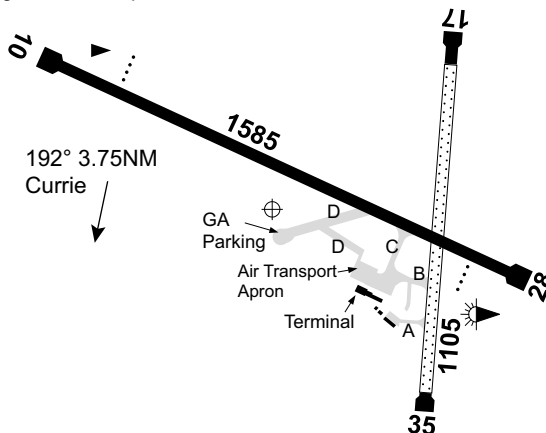
395239S

1435242E

VAR 12 DEG E

CERT

AD OPR King Island Council, PO Box 147, Currie, King Island, TAS, 7256. Email: airport@kingisland.tas.gov.au. ARO 03 6462 1499. Council PH 03 6462 9000. Website: www.kingisland.tas.gov.au/live/airport/.

**REMARKS**

1. AD Charges: all ACFT. Copies of conditions of use can be obtained from AD OPR or website.
2. This AD is a Security Controlled Airport.
3. Hi visibility safety vest (or equivalent) and valid ASIC or King Island VIC must be worn/displayed airside.

HANDLING SERVICES AND FACILITIES

Fuel supplied by IOR Aviation Pty Ltd. JET A1 H24. Payment method via IOR Aviation tag for account holders or via the Fuelcharge APP. PH 1300 457 467.

PASSENGER FACILITIES

HC (King Island Car Rental)/LG/RF/WC.

AERODROME OBSTACLES

1. IWI 142FT AMSL BRG 105 MAG 672M FM ARP. Infringes TNS by 1.3FT.
2. Fence 128FT AMSL PARL to RWY LOC 553M to 620M FM SOT RWY 10 and 91M S of RCL infringes TNS by up to 4.3FT.
3. Tree:
 - a. 152FT AMSL BRG 312 MAG 553M FM ARP infringes TNS by up to 9.5FT.
 - b. 165FT AMSL BRG 275MAG 306M FM ARP infringes TNS by up to 6.2FT.

APRONS AND TAXIWAYS

1. Code C ACFT limited to use TWY C WID 15M.
2. TWY C and Air Transport APN bitumen sealed.
3. TWY B WID 15M, gravel.
4. TWY D WID 10.5M, gravel.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT C, METAR/SPECI.
2. AWIS PH 03 6283 8603 - Report faults to BoM.
3. AWIS FREQ 128.75 (requires one-second pulse to activate) - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

10/28 103 52a

PCN 15/F/C/1.05 MPa/U Sealed

WID 30 RWS 150

17/35 172 36c

PCN 10/F/C/0.58 MPa/U Grey gravel: 95(311) N end
and 42 (137) S end sealed

WID 30 RWS 90

AERODROME AND APPROACH LIGHTING

RWY 10/28

LIRL(2)

AFRU+PAL 126.85

SDBY PWR AVBL

RWY 10/28

PAPI(3)

AFRU+PAL 126.85 3.0 DEG41FT

SDBY PWR AVBL

RWY 17/35

PTBL(1)

BY PRIOR
ARRANGEMENT

- (1) MED EMERG only, 60 MIN PN RQ to ARO.
- (2) White LED.
- (3) LED lighting type. Left side.
1. RWY edge light spacing: 10/28 - 59M, LIRL white.
2. THR: green.
3. RWY ends: red.

OTHER LIGHTING

1. SDBY PWR switchover time: 15 SEC.
2. TWY LGT: Blue edge.
3. Blue edge LGT on RWY 10/28 turn pads.
4. RWY holding position LGT: Amber edge.
5. HBN (Telstra Tower) to NNW of AD.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA

MELBOURNE CENTRE

123.9 On Ground

RADIO NAVIGATION AND LANDING AIDS

NDB KII 332 395320.8S 1435231.2E Range 130 (HN 110) (1)

(1) 003/0.7 to ARP

LOCAL TRAFFIC REGULATIONS

1. RWS not AVBL for LDG or TKOF.
2. VHF transmissions of TAX ACFT may be subject to GND shielding. Extreme CTN must be exercised.
3. ACFT PRKG restrictions apply, PN RQ to ARO.

CTAF - AFRU 126.85

ADDITIONAL INFORMATION

Bird hazard exists. Periods of increases activity will be advised by NOTAM.

CHARTS RELATED TO THE AERODROME

1. WAC 3556, 3469
2. Also refer to AIP Departure and Approach procedures.