

LAUNCESTON**ELEV 562****AVFAX CODE 7002**

TAS

UTC +10

YMLT

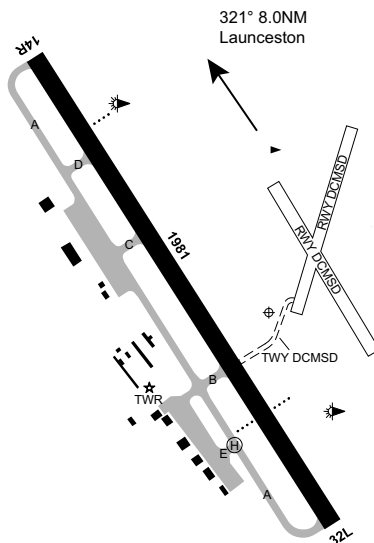
413243S

1471251E

VAR 14 DEG E

CERT

AD OPR Australia Pacific Airports (Launceston) Pty Ltd, Trading as Launceston Airport, PO Box 1220, Launceston, TAS, 7250. PH 0407 305 595 H24.

**REMARKS**

This AD is a Security Controlled Airport.

HANDLING SERVICES AND FACILITIES

MOBIL - Avtas Fuels Pty Ltd: 0130-2130 Local (subject to change in line with airline schedules).

Phone 03 6391 8341, AH call-out fee applies with 1HR PN. AVGAS (tanker), JET A1 (tanker).

ACFT not refuelled on unpaved areas.

AD earthing points not AVBL.

PASSENGER FACILITIES

WC/LG/RF/TX/HC.

RESCUE AND FIREFIGHTING SERVICES

CAT 7:

a. 1955-1215 UTC DLY EXC SAT.

b. 1955-1100 UTC SAT.

Note: All times 1 hour earlier HDS.

APRONS AND TAXIWAYS

- GA areas of S apron and apron TWY limited to ACFT with wingspan less than 22M.
- TWY B BTN TWY A and S apron not AVBL to ACFT larger than A320/B737-7 types.
- TWY E limited to ACFT with MTOW of 50,000KG and wingspan less than 22M.

AERODROME OBSTACLES

- Light on building 626FT AMSL BRG 295 DEG MAG 1,500M FM ARP infringes transitional SFC by 17FT.
- Glide path aerial 593FT AMSL BRG 141 DEG MAG 441M FM ARP obstructs TNS by 10FT.
Lit.
- Unlit:
 - Water tank 576FT AMSL BRG 153 DEG MAG 1,144M FM ARP infringes APCH SFC by 10FT.

- b. Railway bridge 554FT AMSL BRG 138 DEG MAG 825M FM ARP obstructs APCH SFC by 5FT.
- c. Cocked Hat Hill 737FT AMSL BRG 317 DEG MAG 3,445M FM ARP infringes APCH SFC by 33FT.
- d. Rod on building 635FT AMSL BRG 295 DEG MAG 1,503M FM ARP infringes TNS by 26FT.
- e. APN LGT 618FT AMSL BRG 277 DEG MAG 731M FM ARP infringes TNS by 8FT.
- f. APN LGT 619FT AMSL BRG 265 DEG MAG 577M FM ARP infringes TNS by 8FT.
- g. Near field monitor 578FT AMSL BRG 305 DEG MAG 1,514M FM ARP infringes APCH SFC by 4FT and TKOF by 2FT.
- 4. Power poles, unlit:
 - a. 562FT AMSL BRG 153 DEG MAG 1,042M FM ARP infringes APCH SFC by 3FT.
 - b. 584FT AMSL BRG 150 DEG MAG 1,386M FM ARP infringes APCH SFC by 2FT.
- 5. Trees:
 - a. 555FT AMSL BRG 151 DEG MAG 965M FM ARP infringes APCH and TKOF SFC by 1FT.
 - b. 560FT AMSL BRG 152 DEG MAG 1,008M FM ARP obstructs APCH SFC by 4FT.
 - c. 583FT AMSL BRG 150 DEG MAG 1,345M FM ARP. Obstructs APCH SFC by 5FT.
 - d. 591FT AMSL BRG 151 DEG MAG 1,456M FM ARP infringes TNS by 3FT.
 - e. 594FT AMSL 158 DEG MAG 907M FM ARP infringes TNS by 32FT.
 - f. 627FT AMSL BRG 294 DEG MAG 1,455M FM ARP infringes TNS by 13FT.
 - g. 628FT AMSL BRG 295 DEG MAG 1,446M FM ARP infringes TNS by 26FT.
- 6. Bush:
 - a. 555FT AMSL BRG 138 DEG MAG 831M FM ARP obstructs APCH SFC by 6FT.
 - b. 716FT AMSL BRG 316 DEG MAG 3,417M FM ARP infringes APCH SFC by 16FT.
- 7. Fences, unlit:
 - a. 580FT AMSL BRG 309 DEG MAG 1,535M FM ARP infringes APCH SFC by 4FT and TKOF SFC by 2 FT.
 - b. 567FT AMSL BRG 310 DEG MAG 1,288M FM ARP infringes transitional SFC by 6FT.
 - c. 568FT AMSL BRG 310 DEG MAG 1,318M FM ARP infringes APCH SFC by 6FT.
 - d. 578FT AMSL BRG 300 DEG MAG 1,503M FM ARP infringes APCH SFC by 7FT.
 - e. 554FT AMSL BRG 156 DEG MAG 898M FM ARP infringes APCH SFC by 5FT.
- 8. Localiser, lit:
 - a. 582FT AMSL BRG 305 DEG MAG 1,612M FM ARP infringes APCH SFC by 2FT.
 - b. Localiser BLDG 583FT AMSL BRG 302 DEG MAG 1,630M FM ARP infringes APCH SFC by 2FT and TKOF by 1FT.
 - c. Aerial 578FT AMSL BRG 305 DEG MAG 1,514M FM ARP infringes APCH SFC by 4FT.

METEOROLOGICAL INFORMATION PROVIDED

- 1. TAF CAT A, METAR/SPECI, AD WRNG.
- 2. AWIS Phone 03 6283 8604 - Report faults to BoM.
- 3. AWIS FREQ 112.6 AVBL outside TWR HR - Report faults to AD OPR.
- 4. MET INFO AVBL FM Airservices Pilot Briefing. Elaborative briefing FM MWO 03 6221 2026.

PHYSICAL CHARACTERISTICS

14R/32L 133 65a PCN 42/F/C/1.40 MPa/U Grooved WID 45 RWS 150
 W side VFR and IFR side transition infringed when ACFT parked on main apron.

AERODROME AND APPROACH LIGHTING

RWY 14R/32L	HIRL(1)	AFRU+PAL 118.7		SDBY PWR AVBL
RWY 14R/32L	MIRL(1)	AFRU+PAL 118.7		SDBY PWR AVBL
RWY 14R	PAPI(2)	AFRU+PAL 118.7	3.0 DEG53FT	SDBY PWR AVBL
RWY 32L	HIAL-CAT I(4)	AFRU+PAL 118.7		SDBY PWR AVBL
RWY 32L	PAPI(3)	AFRU+PAL 118.7	3.0 DEG53FT	SDBY PWR AVBL

- (1) Operates on pre-set intensity during PAL OPS. HIRL preset dusk only, MIRL preset dark.
- (2) Left side.
- (3) Double sided.
- (4) Operates on pre-set intensity during PAL OPS - stage 4 dusk, stage 2 dark.

1. **ALS type and length**
 - a. RWY 32L - distance coded CL: 912M.
 - b. White cross bar lights installed 155M, 309M, 464M, 616M and 745M FM THR. Spaced at 2.7M intervals.
 - c. All lights in the RESA before THR are flush inset lights.
2. RWY edge light spacing: 14R/32L: 58M.
3. Outside TWR HR, RWY, PAPI and Approach lighting AVBL at preset levels.
4. AFRU+PAL 118.7 AVBL outside TWR HR.
5. Responsible person AVBL on CTAF outside TWR HR. Report PAL faults on CTAF or phone 0407 305 595, H24, and Melbourne Centre 123.8.

OTHER LIGHTING

ABN ALTN 8 WG

1. Secondary PWR switchover time: 1 SEC during LVP; 15 SEC other times.
2. TWY LGT: Green CL.

ATS AND AERODROME COMMUNICATION FACILITIES

- | | | | |
|------|------------------|-----|----------------------|
| FIA | LAUNY CENTRE | (1) | 123.8 On Ground |
| FIA | MELBOURNE CENTRE | (2) | 123.8 On Ground |
| APP | LAUNY APPROACH | (3) | 123.8 |
| ATIS | LAUNY ATIS | | 112.6 (4) 134.75 (5) |
| TWR | LAUNY TOWER | | 118.7 |
- (1) During APP HR
 - (2) Outside APP HR
 - (3) Automatic re-transmit when combined with HOBART APP
 - (4) During TWR and APP HR. Outside TWR and APP HR - AWIS
 - (5) H24 and by Phone 03 6391 6969
 1. TWR and APP HR: 1950-1210 UTC DLY (1HR earlier during HDS).
 2. Phone LT TWR: 03 6391 6992^, LT APP: 03 9235 2012^.
 3. LAUNY TWR provide non-surveillance TWR CTL services within the YMLT Class D CTR, SFC to 1,500FT AMSL.
 4. LAUNY APP provide surveillance APP CTL service within 30NM YMLT in Classes A, C, D and E airspace, SFC - FL245.
 5. Outside TWR and APP HR, Class D and C airspace WI 36NM LT, SFC to 8,500FT AMSL becomes Class G.

Note: TWR and APP may operate independently, hours or airspace responsibility may change at short notice. Check status of airspace with ATS, NOTAM or Launceston ATIS.

RADIO NAVIGATION AND LANDING AIDS

- | | | | | | |
|-----|-----|----------------|-----------|------------------------------------|-----|
| DME | ILT | 109.5/ 32X | 413255.9S | 1471259.3E | (3) |
| | | (RWY32L) | | | |
| GP | ILT | 332.6 (RWY32L) | 413256.1S | 1471259.0E | |
| ILS | ILT | 109.5 (RWY32L) | 413203.2S | 1471206.0E | |
| LOC | ILT | 109.5 (RWY32L) | 413203.2S | 1471206.0E | |
| DME | LT | 112.6/ 73X | 413237.7S | 1471247.0E | (4) |
| NDB | LT | 242 | 413339.8S | 1471330.3E | (2) |
| | | | | Range 75 (HN 60) OW 150 (OW HN110) | |
| VOR | LT | 112.6 | 413237.8S | 1471247.7E | (1) |
- (1) CAUTION: VOR 010 radial unreliable outside 30 NM at LSALT.
 - (2) 322/1.2 to ARP.
 - (3) Antenna ELEV 560FT.
 - (4) Antenna ELEV 566FT.

Outside TWR HR LOC, GP, VOR, DME, monitored by Melbourne Centre. All other aids pilot monitored. ILS not protected outside TWR HR.

LOCAL TRAFFIC REGULATIONS

1. **INSTRUMENT APPROACH TRAINING**
 - a. Capacity for instrument APCH training at YMLT is limited and is subject to scheduled operations. Instrument APCH training availability can be found via www.bookawk.com.
 - b. All aircraft planning practice instrument APCH (AVBL during APP HR only) must book a slot online at www.bookawk.com.

- c. Practice approaches to the non-duty runway may not be available or subject to extensive delays.

2. **CIRCUIT TRAINING**

- a. Circuit training availability can be found via www.tas.bookawk.com.
- b. All aircraft planning circuit training should book a slot online at www.tas.bookawk.com.

3. **CTR AIRWORK**

All aircraft planning AWK other than circuit training or instrument approach training should coordinate via phone with Launceston Tower prior to operating.

4. **LAUNCESTON CTA SURVEY**

- a. Survey aircraft operating in CTA must book online via www.bookawk.com. If access to the booking page is not AVBL contact Shift Manager 1, Melbourne on 03 9235 2012 BTN 0700 and 2000 Local DLY.
- b. For survey flights, operators must email maps to: ml.sm1@airservicesaustralia.com and call Shift Manager 1, Melbourne on 03 9235 2012 to discuss their planned operations prior to becoming airborne each day.

5. **ACFT parking:**

- a. Main terminal APN: parking and security restrictions apply for non-RPT ACFT. Prior approval RQ FM AD OPR, H24
- b. Southern freight APN: ACFT ABV 5,700KG and itinerant ACFT in excess of 4HR duration or HN. Prior approval RQ FM AD OPR.

FLIGHT PROCEDURES

1. **ATC TRAFFIC MANAGEMENT SPEED**

ACFT ARR or DEP YMLT (including practice instrument APCH) must not exceed 250KT IAS when BLW 10,000FT AMSL. Advise ATC if a higher speed is operationally required.

2. **OUTSIDE TWR AND APP HR PROCEDURES**

- a. Melbourne Centre provides ATS in the Launceston Class A, C and E airspace ABV 8,500FT AMSL and Class E ABV 12,500FT AMSL within 30NM LT.
- b. Melbourne Centre provides Class G services 8,500FT AMSL and BLW within LT CTA steps.
- c. Departures:
 - (i) Normal CTAF Procedures apply.
 - (ii) Include RWY and preferred departure procedure (if IFR) with Taxi report to Melbourne Centre.
- d. Arrivals:
 - (i) On first contact, advise Melbourne Centre of intended landing RWY and preferred approach (if IFR).

3. **LOW VIS TAKEOFFS**

CASA approved operators, RWY 14R/32L is capable of supporting takeoffs with a RWY VIS of not less than 350M (within ATC hours).

CTAF - AFRU 118.7

Outside TWR HR.

NOISE ABATEMENT PROCEDURES

Noise Abatement Procedures (NAP) apply. Refer AIP DAP.

ADDITIONAL INFORMATION

Bird hazard exists:

- a. Flocks of forest ravens prevalent on AD in the spring lambing season.
- b. Daylight and nocturnal hazard FM Masked Lapwing and Banded Lapwing on AD FM APR to the end of JUL.
- c. Flocks of common starlings prevalent on and around AD from MAY to the end of OCT.

CHARTS RELATED TO THE AERODROME

1. WAC 3556.
 2. Also refer to AIP Departure and Approach Procedures.
-