


WYNYARD
AVFAX CODE 7010
TAS
405956S
1454352E
AD OPR Burnie Airport Corporation, PO Box 420, Wynyard, TAS, 7325. Email:
admin@burnieairport.com.au. PH 03 6442 1133 (ADMIN/OPS). Mobile 0408 551 440 (on call Duty
EMERG Officer - if not answered ring 0498 954 921). Website: www.burnieairport.com.au.

ELEV 63

UTC +10
VAR 13 DEG E
WYYY
CERT

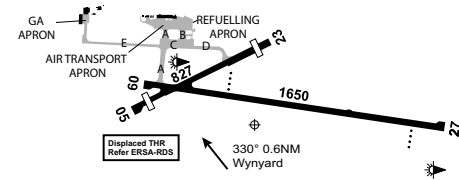

REMARKS
1. AD Charges: All ACFT
2. This AD is a Security Controlled Airport.
3. Hi VIS vest or equivalent and valid ASIC or Burnie airport issued VIC must be worn/
displayed airside.

HANDLING SERVICES AND FACILITIES
Ground Handling Agents:
TSM Ground Handling Pty Ltd PH: 0408 112 119.
AusFlight Handling PH: 0448 273 509.
Fuel Supplier: World Fuel Services: AVTAS Fuels Pty Ltd. 0600-1800 Local (subject to change in
line with airline schedules). CTC 0418 504 359. AVGAS 24HR carnet card and credit card
(via smartphone app) activated bowser and JET A1 (tanker) AH call-out fee may apply with
1HR PN. ACFT - Opt not refuelled on un-paved areas.

PASSENGER FACILITIES
TX (03 6431 2199)/HC (Avis, Hertz, Thrifty and Dollar)/LG/RF (0456 528 357)/WC/ME.

APRONS AND TAXIWAYS
All designated aprons and TWY bitumen sealed.

SURFACE MOVEMENT AND GUIDANCE
All taxi guidelines and APN parking restrictions indicated by painted pavement markings.

AERODROME OBSTACLES
1. MIOL:
a. Busby's Hill ELEV 663FT, BRG 118 DEG 3.0NM FM ARP.
b. AM/FM radio TWR ELEV 644FT, BRG 337 DEG 2.2NM FM ARP.
c. Broadcast Australia TWR ELEV 716FT BRG 338 DEG 2.7NM FM ARP.
2. LIOL - Optus TWR ELEV 288FT BRG 315 DEG 1.9NM FM ARP.

METEOROLOGICAL INFORMATION PROVIDED
1. TAF CAT C, METAR/SPECI.
2. AWIS Phone 03 6283 8608 - Report faults to BoM.
3. AWIS FREQ 133.35 (requires one-second pulse to activate) - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS
05/23 051 27a PCN 9/F/A/0.60 MPa/T Sealed WID 18 RWS 60
09/27 086 54a PCN 20/F/A/Y/T Grooved. WID 30 RWS 150
RWY 05/23 limited to ACFT BLW 5,700KG.

AERODROME AND APPROACH LIGHTING
RWY 09/27 LIRL AFRU+PAL 126.9 SDBY PWR AVBL
RWY 09/27 PAPI AFRU+PAL 126.9 3.0 DEG41FT SDBY PWR AVBL
RWY edge light spacing: 09/27: 59M.

OTHER LIGHTING

1. SDBY PWR Switchover time: 6 SEC.
2. TWY LGT: Blue edge on TWY A, B and C.
3. Taxi holding PSN LGT: Amber edge.
4. Blue edge LGT on RWY turn pads.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA MELBOURNE CENTRE 122.6 On Ground

RADIO NAVIGATION AND LANDING AIDS

NDB WYY 302 405952.7S 1454229.6E Range 65 (HN 60) OW 160 (1)
(OW HN110)

- (1) 071/1.0 to ARP.

LOCAL TRAFFIC REGULATIONS

1. All ACFT ABV 20,000KG MTOW must execute 180 DEG turns at RWY end turn pads.
2. Parking restrictions apply to use of air transport apron.
3. Access to all Bays requires 24HR prior permission from AD OPR.
4. Fuelling apron MAX wingspan 24M. Standing permitted only while refuelling.
5. Code C ACFT limited to use of TWY A, B and C (WID 15M) and main apron parking bay allocated by AD OPR.
6. Taxi on RWY 05/23 and TWY D (WID 10.5M) not AVBL to ACFT ABV 5,700KG except with AD OPR approval.
7. TWY E (WID 7.5M) and GA Apron not AVBL to ACFT ABV 5,700KG.

FLIGHT PROCEDURES

Right Hand circuits RQ when OPR on RWY 23 and RWY 27.

CTAF - AFRU 126.9

1. VHF COM between aircraft on ground Devonport & Wynyard may not be AVBL.
Note: Due to communication difficulty between Devonport and Wynyard for ACFT on GND, pilots are encouraged to make calls airborne and/or on departure, as appropriate, on the CTAF to enhance self help TFC INFO.

ADDITIONAL INFORMATION

1. CAUTION: Bird hazard exists October to February.
2. ACFT DEP RWY 23 in strong SW winds can expect downdraughts and moderate to SEV TURB.

CHARTS RELATED TO THE AERODROME

1. WAC 3556.
 2. Also refer to AIP Departure and Approach Procedures.
-