


STANDARD INSTRUMENT ARRIVAL (STAR) GOMOL FIVE ALPHA ARRIVAL (RNAV) RWY 01L/19R BRISBANE, QLD (YBBN)

03 SEP 2026

ATIS	APP			TWR	SMC			Bearings are Magnetic Elevations in FEET AMSL
113.2 125.5	NORTH	SOUTH	FINALS	01L/19R 118.0 01R/19L 120.5	NORTH	DOM	SOUTH	
	124.7	125.6	119.25		124.05	121.7	122.25	

NOT TO SCALE

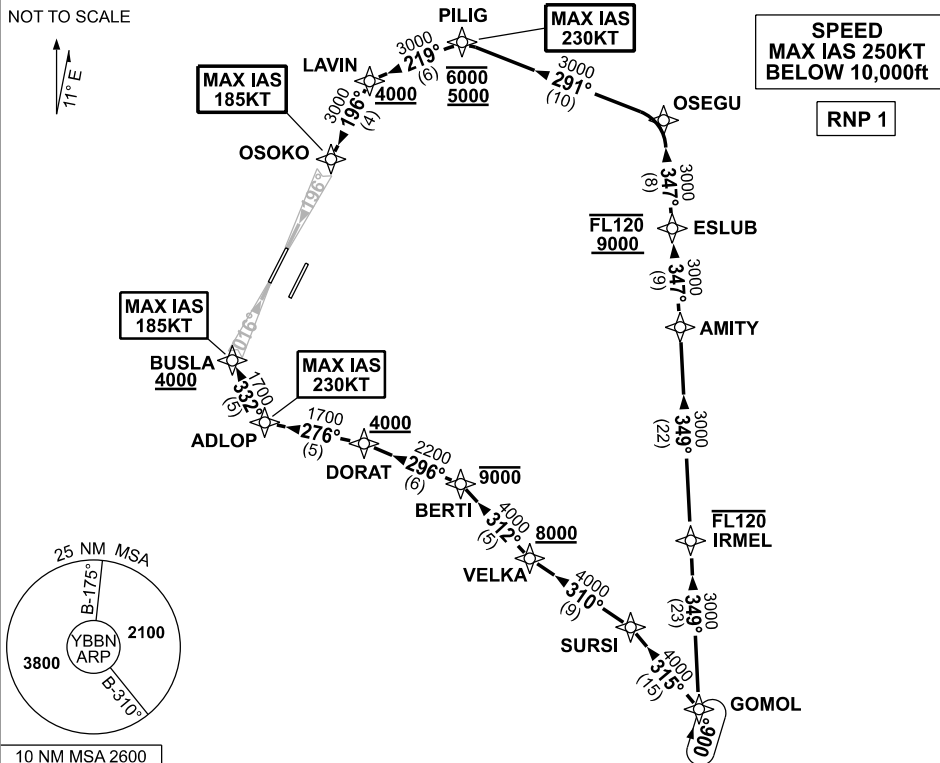

GOMOL FIVE ALPHA ARRIVAL RWY 01L:

- From GOMOL track 315° to SURSI
- Turn LEFT track 310° to VELKA
Cross VELKA AT or ABV 8000ft
- Turn RIGHT track 312° to BERTI
Cross BERTI AT or BLW 9000ft
- Turn LEFT track 296° to DORAT
Cross DORAT AT or ABV 4000ft
- Turn LEFT track 276° to ADLOP
MAX IAS 230KT AT ADLOP
- Turn RIGHT track 332° to BUSLA
for ILS, RNP Z or LOC RWY 01L approach
Cross BUSLA AT or ABV 4000ft
MAX IAS 185KT AT BUSLA

RWY 19R:

- From GOMOL track 349° to IRMEL
Cross IRMEL AT or BLW FL120
- Track 349° to AMITY
- Turn LEFT track 347° to ESLEUB
Cross ESLEUB BTN 9000ft and FL120
- Track 347° to OSEGU
- Turn LEFT track 291° to PILIG
Cross PILIG BTN 5000ft and 6000ft
MAX IAS 230KT AT PILIG
- Turn LEFT track 219° to LAVIN
Cross LAVIN AT or ABV 4000ft
- Turn LEFT track 196° to OSOKO
for ILS, RNP Z or LOC RWY 19R approach
MAX IAS 185KT AT OSOKO

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

IF ABLE CTC BN ATC ON TEL: (07) 3866-3694

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

Changes: FROM SUP H50/26.

BBNSR47-188