04 SEP 2025

USE QNH

RNP RWY 26

MELBOURNE/ESSENDON, VIC (YMEN)

ATIS	AWIS	APP	TWR	SMC	ML APP (AH)	PAL+AA (AH)
119.8	133.2	132.0 (ML)	125.1	121.9	118.45	124.1

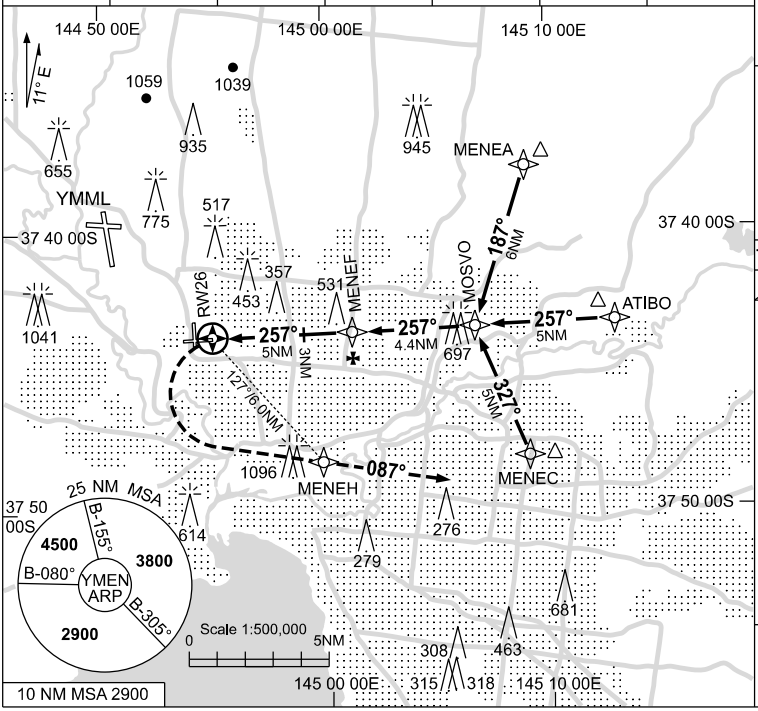

RNP APCH LNAV/VNAV RQMNTS:

- YMEN QNH RQ
- YMEN TEMP RQ
- PROC TEMP RANGE -5°C TO +60°C

Holding not available

TR IN	TURN	TIME	MIN ALT	DME LMT

AD ELEV 282

Bearings are Magnetic
Elevations in FEET AMSL

NM TO NEXT WPT	RW26	1.3	1.4	1.6	2	3	4	MENEF	1	2	3	3.5
ALT (3° APCH PATH)		700	720	810	930	1250	1560	1880	2200	2520	2840	3000

MISSED APPROACH:

AT RW26 TURN LEFT,
TRACK DCT TO MENEH,
THEN TRACK 087°.
CLIMB TO 3000ft OR
AS DIRECTED BY ATC.

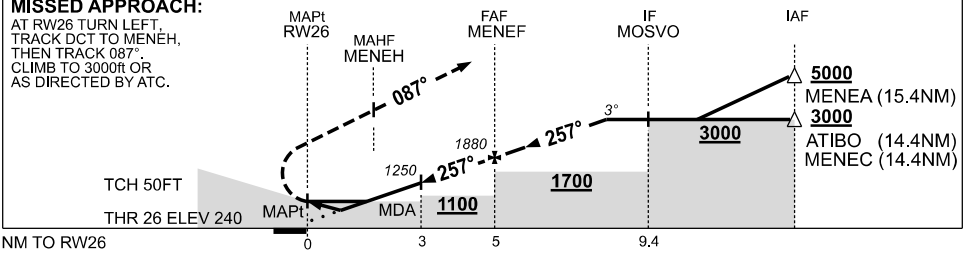

NOTES

1. MAX IAS:
   INITIAL : 210KT.
   MISSED APCH TURN : 240KT.

CATEGORY	A	B	C	D
LNAV/VNAV	**700** (460-2.6)			**720** (480-2.7)
LNAV	**810** (570-3.2)			
CIRCLING	**990** (708-2.4)		**1260** (978-4.0)	**1540** (1258-5.0)
ALTERNATE	(1208-4.4)		(1478-6.0)	(1758-7.0)

Changes: PAL+AA.

MENGN01-184

© Airservices Australia

airservices australia