

RNP RWY 23
ADELAIDE, SA (YPAD)

ATIS
116.4 134.5

APP
118.2 124.2

TWR
120.5

SMC
121.7

RNP APCH
RNAV/VNAV RQMTS:
• YPAD LOCAL QNH RQ
• YPAD LOCAL TEMP RQ
• PROC TEMP RANGE
-5°C TO +61°C

Holding at PADNJ

172°
222°
042°

TR IN	TURN	TIME	MIN ALT	DME LMT
292°	Right	1	3800	

ATC APCH SPEEDS

NM FM THR	SPEED KT
10	185-160
5	160-150

AD ELEV 20
Bearings are Magnetic
Elevations in FEET AMSL


25 NM MSA
1900
2700
3800
B-040°
B-170°
B-329°

10 NM MSA 3800

4 DME AD
3NM THR 05/23
* NO CIRCLING

NM TO NEXT WPT	PADNM	1.1	1.4	2	2.3	3	4	5	6	7	PADNF	1	2	3.7
ALT (3° APCH PATH)		430	520	710	800	1030	1340	1660	1980	2300	2620	2940	3250	3800

TRACK DCT TO PADNH,
THEN TRACK 222°,
CLIMB TO 3800ft OR
AS DIRECTED BY ATC.

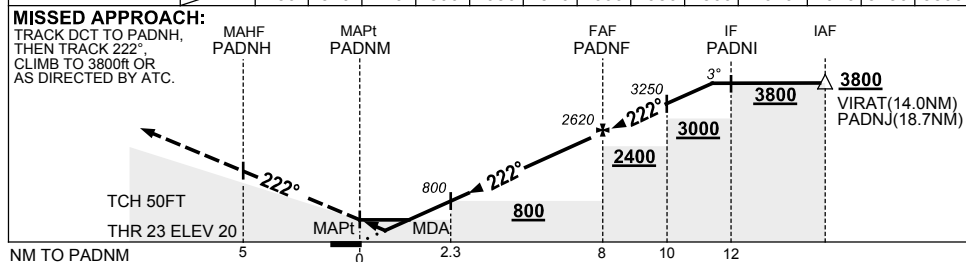

1. MAX IAS:
INITIAL : 210KT.
- *2. NO CIRCLING SOUTH
OF RWY 05/23 BEYOND
4 DME AD OR BEYOND
3NM FM THR 05/23/30.
3. HLDG MAY NOT BE
CONTAINED IN CTA.
4. **COLOUR:** SEE
SPEC NOTICES.

CATEGORY	A	B	C	D
LNAV/VNAV		430 (410-1.5)		
LNAV		520 (500-2.0)		
CIRCLING *	900 (880-2.4)		1000 (980-4.0)	1000 (980-5.0)
ALTERNATE	(1380-4.4)		(1480-6.0)	(1480-7.0)

PADGN02-181