


STANDARD INSTRUMENT ARRIVAL (STAR) KABLI THREE ALPHA ARRIVALS (JET) (RNAV) RWY 21/24 PERTH, WA (YPPH)

09 JUL 2026

ATIS 113.7 123.8	APP 123.6	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------	--------------	---	--

NOT TO SCALE

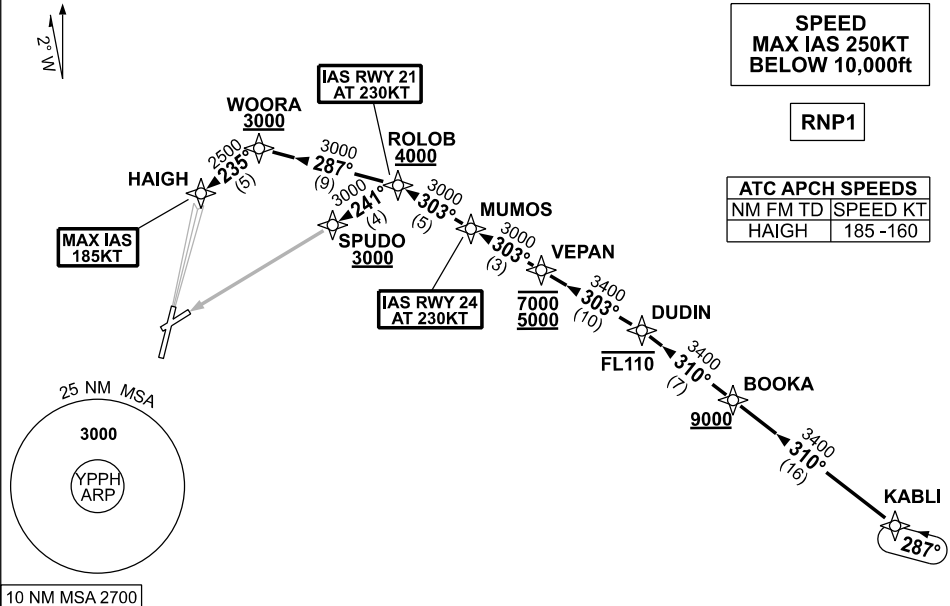

KABL3 THREE ALPHA ARRIVAL

RWY 21:

- From KABLI, track 310° to BOOKA
Cross BOOKA AT or ABV 9000ft
- Track 310° to DUDIN
Cross DUDIN AT or BLW FL110
- Turn LEFT, track 303° to VEPAN
Cross VEPAN BTN 5000ft and 7000ft
- Track 303° to MUMOS
- Track 303° to ROLOB
Cross ROLOB AT or ABV 4000ft
IAS AT 230KT from ROLOB
- Turn LEFT, track 287° to WOORA
Cross WOORA AT or ABV 3000ft
- Turn LEFT, track 235° to HAIGH
for ILS, RNP or
LOC RWY 21 APPROACH
MAX IAS 185KT from HAIGH

RWY 24:

- From KABLI, track 310° to BOOKA
Cross BOOKA AT or ABV 9000ft
- Track 310° to DUDIN
Cross DUDIN AT or BLW FL110
- Turn LEFT, track 303° to VEPAN
Cross VEPAN BTN 5000ft and 7000ft
- Track 303° to MUMOS
IAS AT 230KT from MUMOS
- Track 303° to ROLOB
Cross ROLOB AT or ABV 4000ft
- Turn LEFT, track 241° to SPUDO
for RNP RWY 24 APPROACH.
Cross SPUDO AT or ABV 3000ft

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSB EMERG Section 1.5.

Changes: FROM SUP H09/26.

PPHSR23-187