COOBER PEDY, SA (YCBP)

25 MAY 2017

AWIS	FIA	CTAF+AFRU	PAL		Bearings are Magnetic Elevations in FEET AMSL
122.125	**ML CEN 120.7**	**126.7**	**119.6**		



10 NM MSA 2200

REFERENCE WAYPOINT CBP NDB





AD ELEV 740

SECTOR A



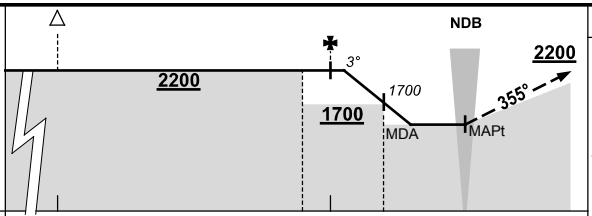

MISSED APPROACH:

TURN LEFT,
TRACK 355°.
CLIMB TO 2200FT.

MAX IAS: 190KT UNTIL ESTABLISHED ON 355°

CIRCLING MINIMA	**A,B: 1390-2.4**	**C: 1620-4.0**	**D: N/A**

NM FM NDB	4.6	4	3	2.8	2									
ALT (3° APCH PATH)	2200	2020	1700	1620	1390									

SECTOR B



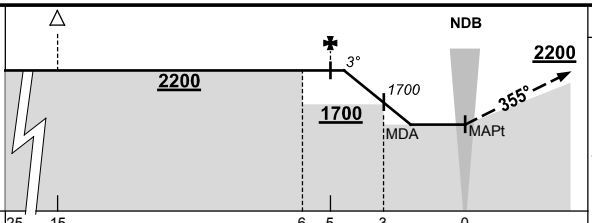

MISSED APPROACH:

TURN RIGHT,
TRACK 355°.
CLIMB TO 2200FT.

MAX IAS: 190KT UNTIL ESTABLISHED ON 355°

NM FM NDB

CIRCLING MINIMA	**A,B: 1390-2.4**	**C: 1620-4.0**	**D: N/A**

NM FM NDB	4.6	4	3	2.8	2									
ALT (3° APCH PATH)	2200	2020	1700	1620	1390									

SECTOR C



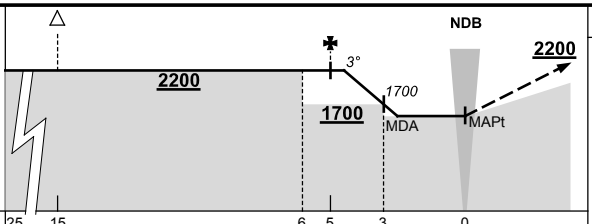

MISSED APPROACH:

CLIMB ON TRACK TO 2200FT.

PROC NOT AVBL WHEN **R246A,B** ACTIVE.

NM FM NDB

CIRCLING MINIMA	**A,B: 1520-2.4**	**C: 1620-4.0**	**D: N/A**

NM FM NDB	4.6	4	3	2.8	2.5									
ALT (3° APCH PATH)	2200	2020	1700	1620	1520									

Changes: AWIS PHONE DELETED.

© Airservices Australia 2017

airservices