


USE QNH

RNAV-Z (GNSS) RWY 04  
**MUDGE, NSW (YMDG)**

15 AUG 2019

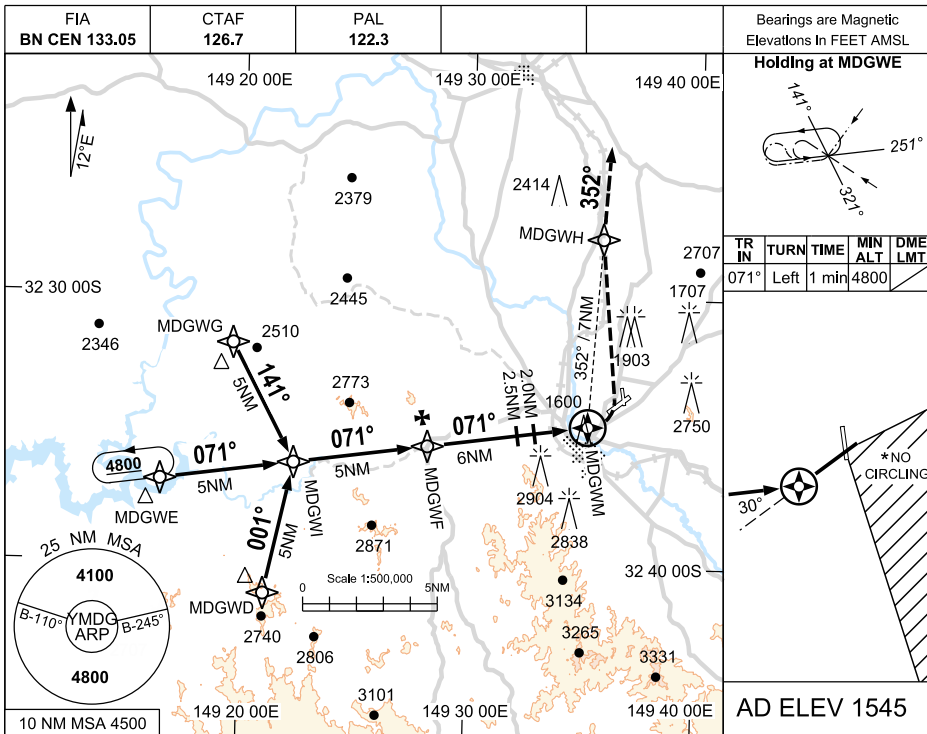


Bearings are Magnetic Elevations In FEET AMSL

**Holding at MDGWE**

TR IN	TURN	TIME	MIN ALT	DME LMT
071°	Left	1 min	4800	

NM TO NEXT WPT	1.8	1	MDGWF	5	4	3	2.5	2	1.1	0.8	MDGWM
ALT (#3.5° APCH PATH)	4800	4520	4150	3780	3400	3030	2850	2660	2370	2260	

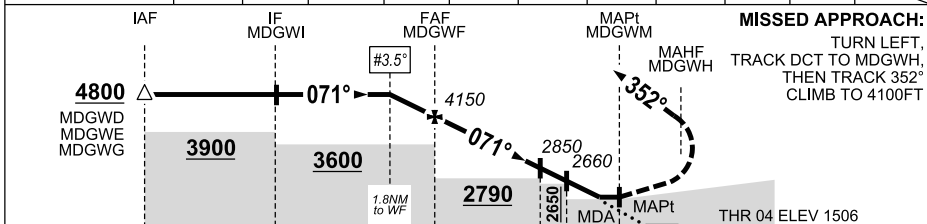

NM FM MAPt	16	11	7.8	6	2.5	2	0	1
Gnd Speed (KTS)	60	70	80	90	100	120	140	160
Desc Rate (fpm) (3.5°)	370	430	500	560	620	740	870	990

CATEGORY	A	B	C	D
RNAV	2370 (864-4.2)		NOT AUTHORISED	NOT APPLICABLE
RNAV (3.3% MAPCH)	2260 (754-3.7)			
CIRCLING *	3160 (1615-2.4)		3520(1975-4.0)	
ALTERNATE	(2115-4.4)		(2475-6.0)	

- NOTES**
- MAX IAS:  
 INITIAL: 210 KTS  
 CAT C MAPCH  
 TURN: 160 KTS
  - NO CIRCLING IN SECTOR E OF RWYS 04/22 AND 16/34
  - AWIS (PHONE)  
 02 9353 6439
  - APCH PATH ANGLE DOES NOT COINCIDE WITH PAPI ON SLOPE INDICATION
  - COLOUR: SEE SPEC NOTICES

Changes: AWIS (PHONE), COORD FMT, LNAV, Editorial



MDGGN02-160