

ILS-Y or LOC-Y RWY 18
AVALON, VIC (YMAV)

ATIS 118.2 116.1
AWIS (AH) 116.1
AV APP 133.55
TWR 120.1
FIA (AH) 135.7
ML CEN 135.7
CTAF+AFRU (AH) 120.1
AFRU+PAL (AH) 120.1

NAVAID REQ:
• DME or GNSS


Holding at MAKAT

TR IN	TURN	TIME	MIN ALT	DME LMT
176°	Left	1	3000	15

AD ELEV 35
Bearings are Magnetic
Elevations in FEET AMSL

NM TO AV DME	3.1	4	5.3	6	7	8	8.9	9	10	10.5			
ALT (3° APCH PATH)	620	920	1340	1560	1880	2200	2500	2520	2840	3000			

TRACK 176°.
CLIMB TO 3000ft.

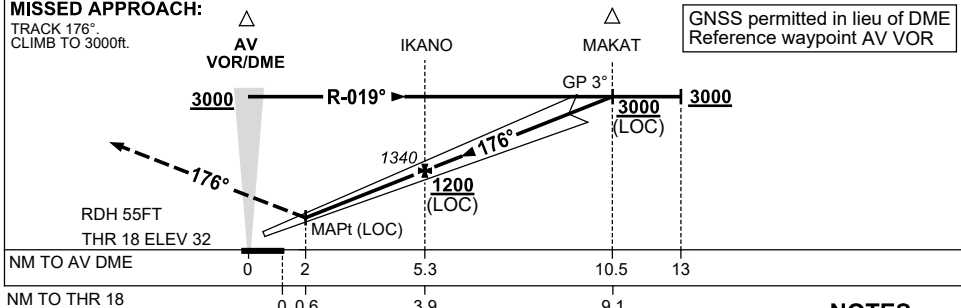

* 1. NO CIRCLING WEST
OF RWY 18 / 36.

2. HLDG PATTERN
NOT CONTAINED
WITHIN CTA.

CATEGORY	A	B	C	D/D _L
S-I ILS	390 (358) 2.0 (VIS 1.5 WITH ACTUAL QNH)			
S-I LOC	620 (585-3.3)			
CIRCLING *	660 (625-2.4)	760 (725-4.0)		830 (795-5.0)
ALTERNATE	(1125-4.4)	(1225-6.0)		(1295-7.0)

MAVII01-183