FOR CASA APPROVED OPERATORS ONLY

30 NOV 2023 **USE QNH**

RNP X RWY 29 (AR)

DARWIN, NT (YPDN)

ATIS	APP-E 125.2 APP-W 134.1	SMC	TWR	DEP	RNV X 29 THR ELEV 81
128.25 308 316.2		121.8	133.1	123.0	

RNP AR APCH
- RF RQ
- YPDN ACT QNH RQ
- YPDN ACT TEMP RQ
- PROC TEMP RANGE +15°C TO +56°C

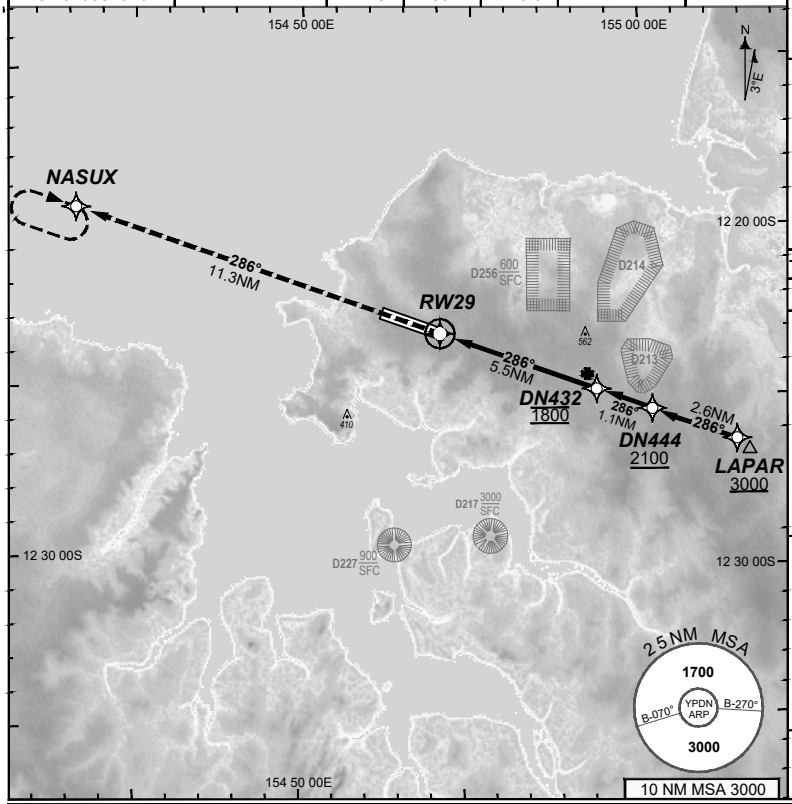

Holding at NASUX



TR IN	TURN	TIME	MIN ALT	DME LMT
106°	Right	1'	3000	

AD ELEV 103

Bearings are Magnetic

Elevations in FEET AMSL

	DN432	DN444
ALT (2.9° APCH PATH)	1800	2139

MISSED APPROACH:

Climb to 3000FT or as directed by ATC via the RNP AR Missed Approach track to NASUX.

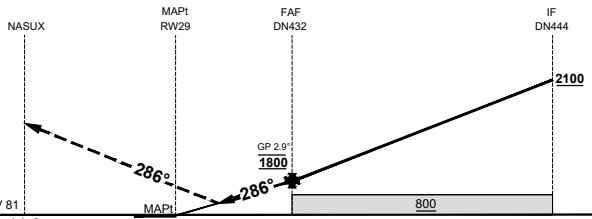

CATEGORY	A	B	C	D
RNP (0.30)	N/A		DA(H) **500** (419 - 2.4) 1.5 HIALS	DA(H) **500** (419 - 2.4) 1.5 HIALS
RNP (0.15)			DA(H) **444** (363 - 2.1) 1.2 HIALS	DA(H) **444** (363 - 2.1) 1.2 HIALS
CIRCLING			NOT AUTHORISED	NOT AUTHORISED
ALTERNATE				

NOTES

1. PAPI not coincident with VPA.
2. RNP 0.3 RQ FROM LAPAR TO DN432.
3. MIN MAP GRAD 4.1% TO 3000FT per ATC.

202307250325 COPYRIGHT © GE DIGITAL, 2023. ALL RIGHTS RESERVED. GE PROPRIETARY INFORMATION

Changes: EDITORIAL

PDNGN15-177

DO NOT USE FOR NAVIGATION

© Airservices Australia 2024 Prepared by GE Aviation - ICAO Doc 9905 Compliant