09 JUL 2026

SYDNEY/NANCY-BIRD WALTON, NSW (YSWS)

ATIS	APP	TWR	SMC		Bearings are Magnetic Elevations in FEET AMSL
127.0	119.35	128.1	124.05		

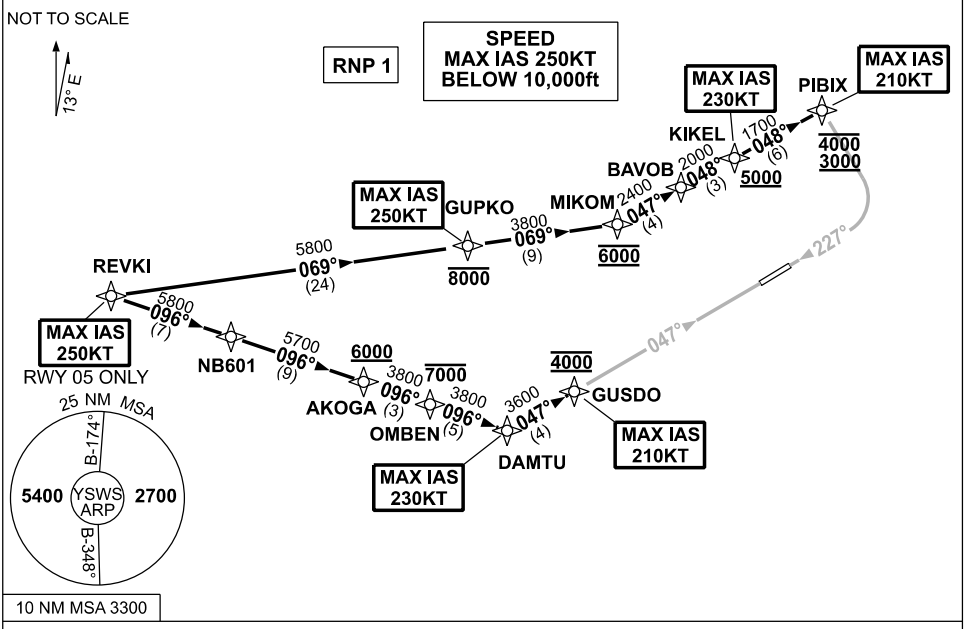

ARRIVAL: REVKI ONE ALPHA

RWY 05:

MAX IAS 250KT from REVKI
- From REVKI, track 096° to NB601
- Track 096° to AKOGA
  Cross AKOGA AT or ABV 6000ft
- Track 096° to OMBEN
  Cross OMBEN AT or BLW 7000ft
- Track 096° to DAMTU
  MAX IAS 230KT from DAMTU
- Turn LEFT, track 047° to GUSDO
  Cross GUSDO AT 4000ft
  MAX IAS 210KT from GUSDO
- Track via ILS, RNP Z
  or LOC RWY 05 approach.

RWY 23:

- From REVKI, track 069° to GUPKO
  Cross GUPKO AT or BLW 8000ft
  MAX IAS 250KT from GUPKO
- Track 069° to MIKOM
  Cross MIKOM AT 6000ft
- Turn LEFT, track 047° to BAVOB
- Turn RIGHT, track 048° to KIKEL
  Cross KIKEL AT or ABV 5000ft
  MAX IAS 230KT from KIKEL
- Track 048° to PIBIX
  Cross PIBIX BTN 3000ft to 4000ft
  MAX IAS 210KT from PIBIX
- Track via ILS, RNP X (AR), RNP Z
  or LOC RWY 23 approach.

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CTC SY APP +61 2 9556 6515

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

Changes: NEW PROCEDURE.

© Airservices Australia

airservices australia