

STANDARD INSTRUMENT DEPARTURES (SID) ARCHERFIELD THREE DEPARTURE (RADAR) - RWY 10L & 28R BRISBANE/ARCHERFIELD, QLD (YBAF)

20 MAR 2025



ATIS 120.9	AWIS 128.4	TWR 118.1 123.6	SMC 119.9	FIA (AH) BN CEN 125.7	CTAF+AFRU (AH) 118.1	AFRU+PAL (AH) 118.1	Bearings are Magnetic Elevations in FEET AMSL
---------------	---------------	--------------------	--------------	--------------------------	-------------------------	------------------------	--

WARNING: Part of these procedures are conducted outside controlled airspace.

NOT TO SCALE



**CLASS D SPEED
LIMITS APPLY**

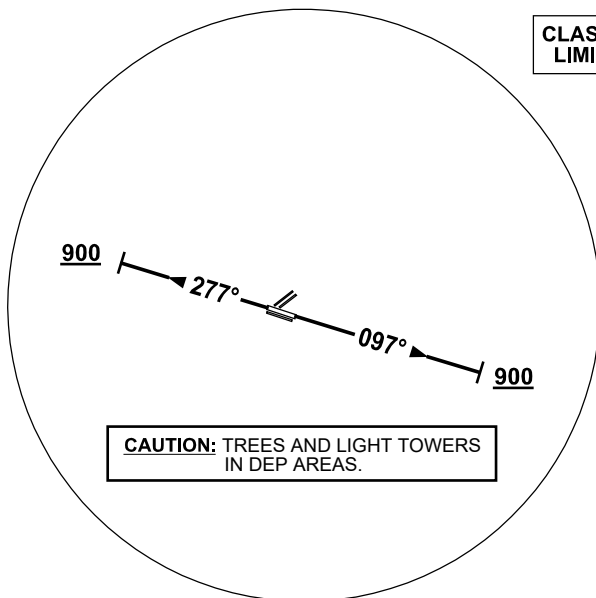

10 NM MSA 2900

ARCHERFIELD THREE DEPARTURE (RADAR)

PROCEDURE NOT AVBL FROM RWY 10R / 28L

WARNING: Part of these procedures are conducted outside controlled airspace.

RWY 10L

- GRAD 3.3%
- Track 097°
- AT or ABV 900ft BUT NOT BEFORE DER turn to assigned heading or track
- Contact Departures when advised by Tower

RWY 28R

- GRAD 4.3% to 1900ft then 3.3%
- Track 277°
- AT or ABV 900ft BUT NOT BEFORE DER turn to assigned heading or track
- Contact Departures when advised by Tower

COMMUNICATIONS FAILURE PROCEDURE

On recognition of communications failure

- Squawk 7600
- Climb on last heading to: 25 MSA (max IAS 180KT) or assigned altitude if higher than 25 MSA (max IAS standard climb IAS)
- Maintain altitude for 2 mins.
- Continue climb to flight plan altitude and proceed in accordance with Flight Plan (As amended by latest ATC clearance and acknowledged, if applicable)

Changes: MSA.

BAFDP01-182