ATIS	APP			TWR	SMC			
	NORTH	SOUTH	FINALS		NORTH	DOM	SOUTH	Bearings are Magnetic Elevations in FEET AMSL
113.2 125.5	124.7	125.6	119.25	01R/19L 120.5 01L/19R 118.0	124.05	121.7	122.25	

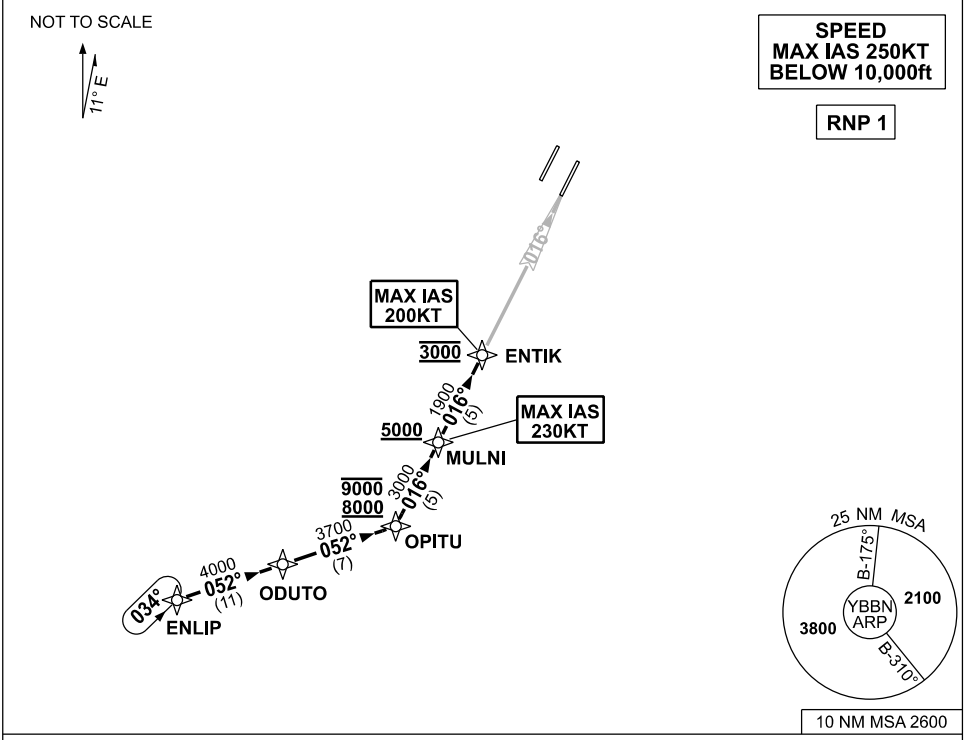

ENLIP THREE ALPHA ARRIVAL

RWY 01R:

- From ENLIP track 052° to ODUTO
- Track 052° to OPITU
  Cross OPITU BTN 8000ft and 9000ft
- Turn LEFT track 016° to MULNI
  Cross MULNI AT or ABV 5000ft
  MAX IAS 230KT AT MULNI
- Track 016° to ENTIK
  for ILS, RNP Z, LOC or RNP T
  RWY 01R approach
  Cross ENTIK AT 3000ft
  MAX IAS 200KT AT ENTIK

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CTC BN ATC ON TEL: (07) 3866-3694

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

Changes: FROM SUP H50/26.

© Airservices Australia