

**STANDARD INSTRUMENT DEPARTURES (SID)
BALLINA ONE DEPARTURE (RADAR)
BALLINA/BYRON GATEWAY, NSW (YBNA)**

09 JUL 2026



ATIS 128.65	AWIS 134.8	TWR 124.2	APP/DEP 118.35	FIA (AH) BN CEN 120.3	CTAF+AFRU (AH) 124.2	PAL+AA 121.3	Bearings are Magnetic Elevations in FEET AMSL
-----------------------	----------------------	---------------------	--------------------------	---------------------------------	--------------------------------	------------------------	--

NOT TO SCALE



**SPEED
MAX IAS 250KT
BELOW 10,000ft**

**CLASS D SPEED
LIMITS APPLY**

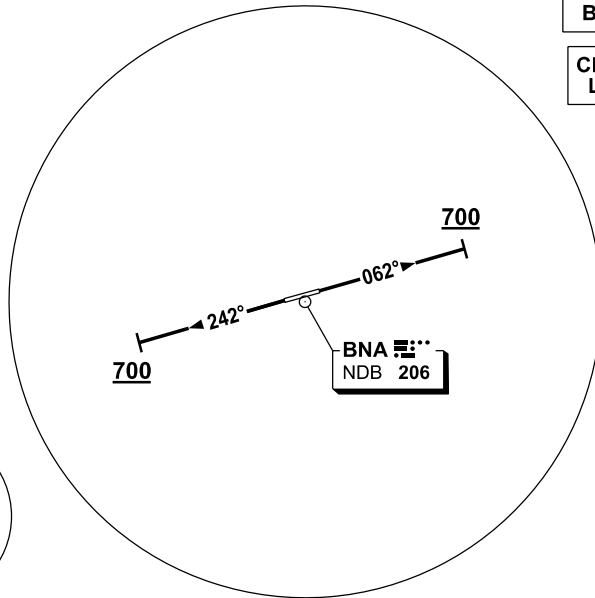

10 NM MSA 3200

BALLINA ONE DEPARTURE (RADAR)

RWY 24

- GRAD 3.9% to 700ft, then 3.3%
- Track 242°
- AT or ABV 700ft turn to assigned heading or track

RWY 06

- GRAD 4.7% to 300ft, then 3.3%
- Track 062°
- AT or ABV 700ft turn to assigned heading or track

COMMUNICATIONS FAILURE PROCEDURE

On recognition of communication failure:

- Squawk 7600
- Maintain last assigned vector for two minutes and, if necessary, climb to minimum safe altitude to maintain terrain clearance, then
- Proceed in accordance with the latest ATC route clearance acknowledged

Changes: NEW PROCEDURE, FREQ.

BNADP03-187