

VOR RWY 23
ADELAIDE, SA (YPAD)

AD 116.4
VOR/DME 116.4

Communication Frequencies:

ATIS 116.4 134.5	APP 118.2 124.2	TWR 120.5	SMC 121.7
---------------------	--------------------	--------------	--------------

Holding at EMPUP (15 AD)

ATC APCH SPEEDS

NM FM THR	SPEED KT
10	185-160
5	160-150

VOR Station Symbol Diagram:


The diagram shows a VOR station symbol with a large 'X' over it. Below the symbol, it indicates "VOR". To the right, there is a note about bearings and elevations.

Bearings are Magnetic Elevations in FEET AMSL

DIST TO AD DME	2.5	3	3.5	4	5	6	7	8	9	10	11	12	12.4
ALT (3.08° APCD PATH)	580	730	900	1060	1390	1710	2040	2370	2690	3020	3350	3670	3800

AT AD VOR TRACK 227°. CLIMB TO 3000FT OR AS DIRECTED BY ATC.

GNSS permitted in lieu of DME
Reference waypoint AD VOR

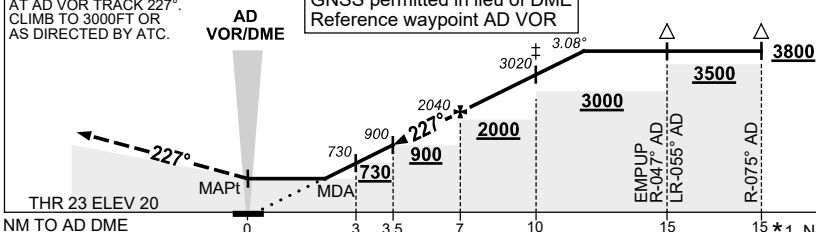

- * 1. NO CIRCLING S OF RWY 05/23 BEYOND 4 DME AD OR BEYOND 3NM FM THR 05/23/30.
- * 2. SPECIAL ALTN MNM 850/4.0KM.
- ‡ 3. ACFT MAY BE RADAR VECTORED TO 10 DME FINAL.
- 4. APCH PATH ANGLE DOES NOT COINCIDE WITH PAPI ON GLIDE SLOPE INDICATION.
- 5. **COLOUR:** SEE SPECUR NOTICES.

CATEGORY	A	B	C	D
S-I VOR/DME	580 (560-2.3)			
CIRCLING *	900 (880-2.4)		1000 (980-4.0)	1000 (980-5.0)
ALTERNATE**	(1380-4.4)		(1480-6.0)	(1480-7.0)

PADVO04-179