

VOR RWY 30
ADELAIDE, SA (YPAD)

ATIS
116.4 134.5

APP
118.2 124.2

TWR
120.5

SMC
121.7

NAVAID RQ:
• DME

Holding at AD R-110° / 15 DME

TR	TURN	TIME	MIN ALT	DME LMT
290°	Left		4000	20

AD ELEV 20
Bearings are Magnetic
Elevations in FEET AMSL

VOR/DME 116.4

ATC APCH SPEEDS

NM	FM	THR	SPEED KT
10			185-160
5			160-150

Scale 1:500,000

25 NM MSA

10 NM MSA 3800

R-350°
R-220°
R-140°

AD VOR

1900
2700
3800

ADELAIDE PARAFIELD

538
493
591
422
1365
2779
901

3 AD + 290°
5.3 AD
6.7 AD
8 AD
10 AD
15 AD
4000

R-088° AD
LR-102° AD
LR-118° AD
R-140° AD

34 50 00S
35 00 00S
138 30 00E
138 40 00E
138 50 00E

8° E


290°

4 DME AD
3NM THR 0572330
*** NO CIRCLING**

DIST TO AD DME	2	3	4	5.3	6	6.7	7	8	9	10	11	12	12.2
ALT (3.2° APCH PATH)	520	880	1220	1660	1890	2130	2230	2570	2910	3250	3590	3930	4000

AT AD VOR TRACK 290°. CLIMB TO 3000ft OR AS DIRECTED BY ATC.

GNSS permitted in lieu of DME
Reference waypoint AD VOR

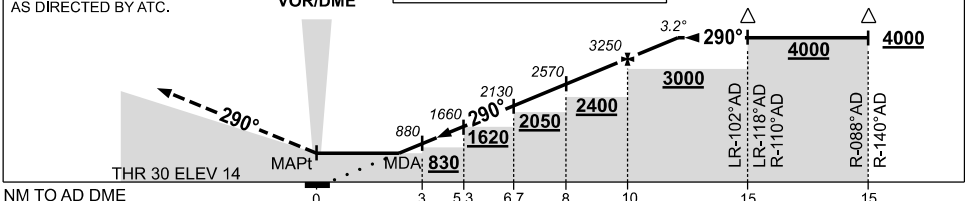

- * 1. NO CIRCLING S OF RWW 05/23 BEYOND 4 DME AD OR BEYOND 3NM FM THR 05/23/30.
- * 2. SPECIAL ALTN MNM 850/4.0 KM.
- 3. APCH PATH ANGLE DOES NOT COINCIDE WITH PAPl ON GLIDE SLOPE INDICATION.
- 4. **COLOUR:** SEE SPEC NOTICES.

CATEGORY	A	B	C	D
S-I VOR/DME	520 (500-2.7)			
CIRCLING *	900 (880-2.4)	1000 (980-4.0)	1000 (980-5.0)	
ALTERNATE **	(1380-4.4)	(1480-6.0)	(1480-7.0)	

PADVO05-186