

STANDARD INSTRUMENT DEPARTURES (SID)
LAKUP SIX DEPARTURE (NON-JET) (RNAV)
DARWIN, NT (YPDN)


19 MAR 2026

ATIS 128.25 308 316.2	ACD 126.8	SMC 121.8	TWR 133.1	APP-E 125.2 APP-W 134.1	Bearings are Magnetic Elevations in FEET AMSL
-----------------------------	--------------	--------------	--------------	----------------------------	--

NOT TO SCALE

**SPEED
MAX IAS 250KT
BELOW 10,000FT**

RNP 1

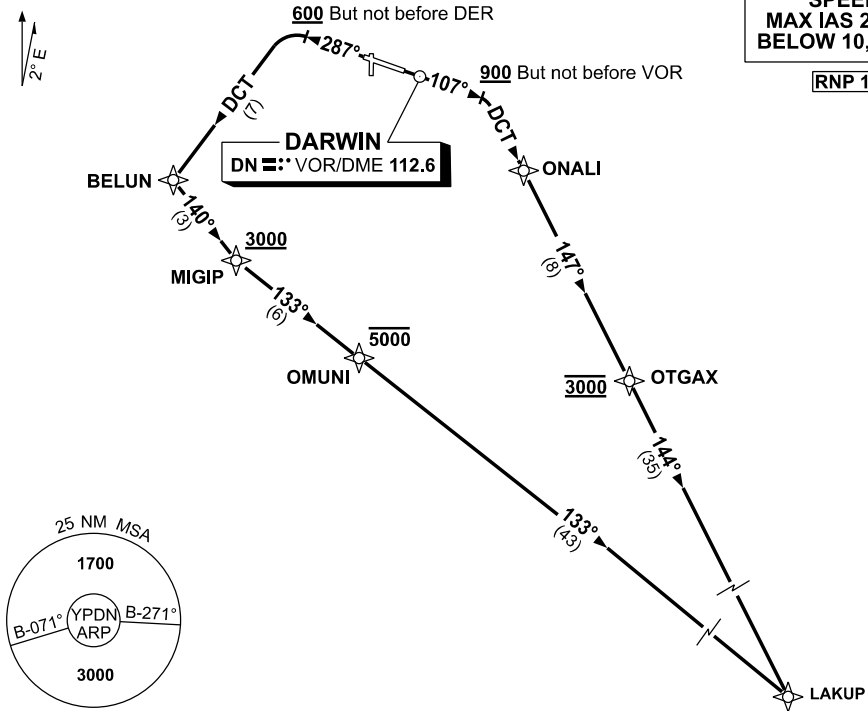

LAKUP SIX DEPARTURE

RWY 11

- GRAD 5.0% to 300ft then 3.3%
- Track 107°
- AT or ABV 900ft, but not before DN VOR turn RIGHT track DCT to ONALI
- Track 147° to OTGAX
- Cross** OTGAX AT 3000ft
- Turn LEFT track 144° to LAKUP

RWY 29

- GRAD 3.3% (7% to 3000ft)
- Track 287°
- AT or ABV 600ft, but not before DER turn LEFT track DCT° to BELUN
- Turn LEFT track 140° to MIGIP
- Cross** MIGIP AT or ABV 3000ft
- Turn LEFT track 133° to OMUNI
- Cross** OMUNI AT or BLW 5000ft
- Track 133° to LAKUP

Changes: MAG VAR, MSA REFERENCE, Editorial.

PDNDP06-186