


# STANDARD INSTRUMENT DEPARTURES (SID) SCARP FIVE DEP - RUNWAYS EAST PERTH/JANDAKOT, WA (YPJT)

23 MAR 2023

ATIS (AWIS AH) 128.65 281	SMC 124.3	TWR (CTAF+AFRU AH) 118.1	FIA PH CEN 135.25	APP (PH) 123.6 132.95	DEP (PH) 118.7	PAL+AA (AH) 123.9	Bearings are Magnetic Elevations in FEET AMSL
------------------------------	--------------	--------------------------------	----------------------	--------------------------	-------------------	----------------------	--------------------------------------------------

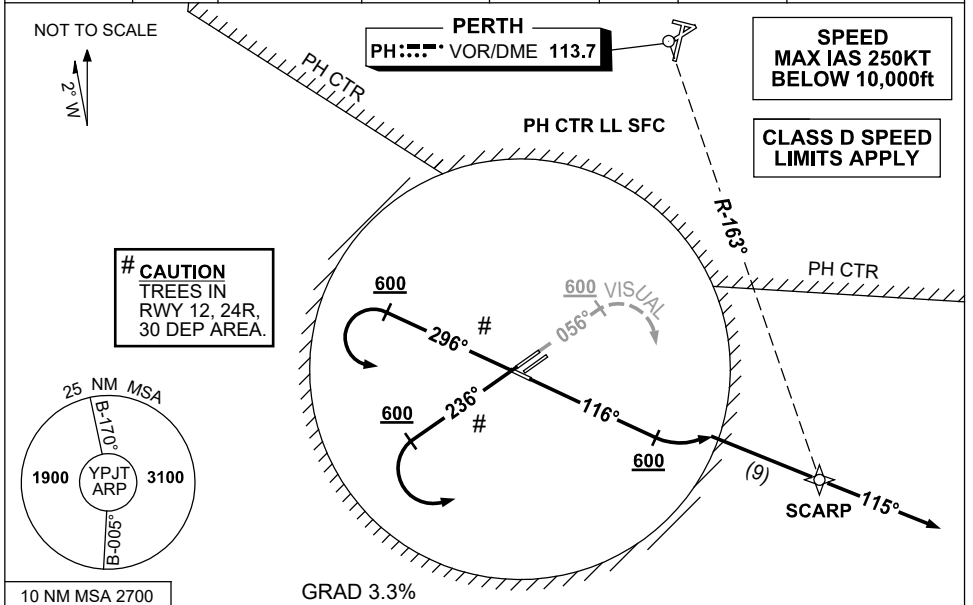

## SCARP FIVE DEPARTURE

PROC NOT AVBL FROM RWY 06R/24L

### RWY 06L (VISUAL) (RNAV)

- Track 056°
- After passing 600ft turn RIGHT visually to intercept and track 115° to SCARP
- Continue tracking 115°, thence as cleared

### REQUIREMENTS RWY 06L:

- Minimum Cloud Base 700ft
  - ACFT must remain visual within Jandakot CTR (3NM from ARP) until the end of initial turn.
  - Visual segment terminated when established on track to intercept 115° to SCARP.
- Cross JT CTR boundary AT or ABV 700ft.

### RWY 24R (RNAV)

- Track 236°
- At passing 600ft turn LEFT to intercept and track 115° to SCARP
- Continue tracking 115°, thence as cleared

### RWY 12 (RNAV)

- Track 116°
- After passing 600ft turn LEFT to intercept and track 115° to SCARP
- Continue tracking 115°, thence as cleared

### RWY 30 (RNAV)

- Track 296°
- After passing 600ft turn LEFT to intercept and track 115° to SCARP
- Continue tracking 115°, thence as cleared

## COMMUNICATIONS FAILURE PROCEDURE

On recognition of communications failure

- Squawk 7600
- Maintain procedure track for two minutes, and
- CLIMB IF NECESSARY TO MINIMUM SAFE ALTITUDE, to maintain terrain clearance, then
- Proceed in accordance with the latest ATC route clearance acknowledged.

Changes: CHART TITLE, RQNMENTS NOTES, REF TO JT NDB REMOVED, MSA.

PJTDPO1-174