USE QNH

RNP RWY 16L

12 JUN 2025

SYDNEY/KINGSFORD SMITH, NSW (YSSY)

ATIS	APP	DIRECTOR	TWR	SMC
118.55	N **124.4** S **128.3**	E **125.3** W **126.1**	**124.7**	E OF RWY 16R/34L **121.7** W OF RWY 16R/34L **126.5**

RNP APCH
LNAV/VNAV RQMNTS:
- **YSSY QNH RQ**
- **YSSY TEMP RQ**
- **PROC TEMP RANGE 0°C TO +61°C**

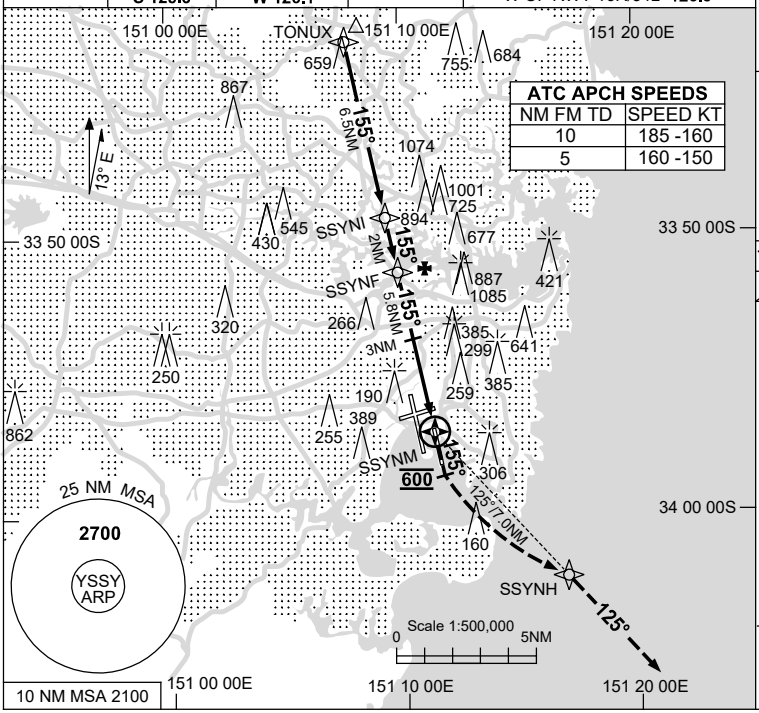

ATC APCH SPEEDS

NM FM TD	SPEED KT
10	185 -160
5	160 -150

Holding as directed by ATC

TR IN	TURN	TIME	MIN ALT	DME LMT

NO CIRCLING

AD ELEV 21

Bearings are Magnetic
Elevations in FEET AMSL

NM TO NEXT WPT	SSYNI	1	SSYNF	5	4	3	2	1.3	0.9	SSYNM
ALT (3° APCH PATH)	2560	2230	1930	1660	1340	1020	700	480	360	

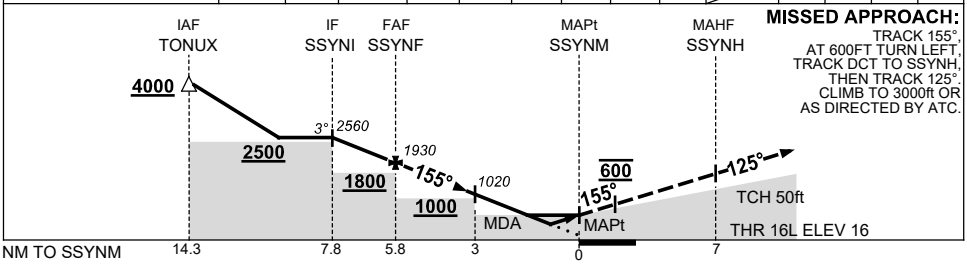

MISSED APPROACH:
TRACK 155°,
AT 600FT TURN LEFT,
TRACK DCT TO SSYNH,
THEN TRACK 125°.
CLIMB TO 3000ft OR
AS DIRECTED BY ATC.

NOTES

1. MAX IAS:
   INITIAL : 210KT.
   MISS APCH: 220KT.

CATEGORY	A	B	C	D
LNAV/VNAV	**360** (344-1.0)			
LNAV	**480** (459-1.7)			
CIRCLING	NOT AUTHORISED			
ALTERNATE	(1189-4.4)		(1479-6.0)	(1479-7.0)

Changes: ATIS FREQ REMOVED, Editorial.

SSYGN01-183

© Airservices Australia

airservices australia