


KOOLAN ISLAND/KOOLAN CENTRAL
AVFAX CODE 6918
WA
160733S
AD OPR Mount Gibson Iron Ltd, Level 1, 2 Kings Park Road, West Perth, WA, 6005. Email:
ki.aerodrome@mgx.com.au. PH 08 9426 7500; Site: 08 9423 0858. ARO 0435 009 670.

ELEV 540

UTC +8
VAR 2 DEG E
YKLC
CERT

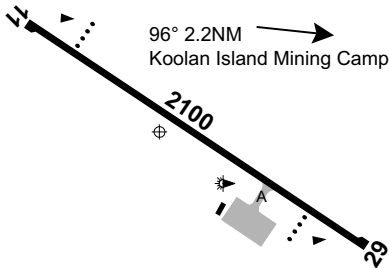

REMARKS

- 1. AD is a private installation - PPR FM AD OPR 24HR.
- 2. PRI and SDBY source of PWR is derived FM generators.

HANDLING SERVICES AND FACILITIES

Air BP - JET A1 via arrangement. CTC ARO.

General

Marshalling provided for all ACFT ABV 5,700KG.

PASSENGER FACILITIES

LG/RF/WC. Telephone facilities AVBL and Telstra 4G mobile reception.

APRONS AND TAXIWAYS

TWY A - Code C, 15M bitumen.

AERODROME OBSTACLES

Lit mast 571FT AMSL BRG 048 MAG 240M FM ARP. Infringes transitional SFC by 3FT.

METEOROLOGICAL INFORMATION PROVIDED

- 1. TAF CAT C, METAR/SPECI.
- 2. AWIS FREQ 122.250 (requires three one-second pulses to activate) - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

11/29	113 69a	PCR 342/F/A/1.40 MPa/T Sealed.	WID 30	RWS 150
-------	---------	--------------------------------	--------	---------

AERODROME AND APPROACH LIGHTING

RWY 11/29	LIRL	AFRU+PAL 127.2	SDBY PWR AVBL
RWY 11/29	PAPI(1)	AFRU+PAL 127.2	3.0 DEG53FT
(1)	Left side.		

RWY edge light spacing: 60M.

OTHER LIGHTING

- 1. TWY LGT: Blue edge.
- 2. SDBY PWR - automatically activated, switchover time: 8 SEC.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA	BRISBANE CENTRE	122.1
UNICOM	KOOLAN ISLAND/KOOLAN	129.35 (1)
	BASE UNICOM	

- (1) All OPS advise AD OPR at least 20MIN prior to ETA.

LOCAL TRAFFIC REGULATIONS

1. RWY 11/29: All fixed wing ACFT ABV 5,700KG must make MAX RAD turns at MNM speed at all turn pads to avoid SFC damage.
2. All ACFT to follow APN markings as required.
3. All jet ACFT to use idle power for movements on the APN with the exception of breakaway thrust to initiate taxi. ACFT that cannot comply with this restriction must advise the AD OPR prior to departure.
4. Pilots are advised that tie-downs in GA parking are untested, and use is at own risk.

FLIGHT PROCEDURES

For special procedures which apply to the Horizontal Falls, see entry under ERSa GEN - SPECIAL PROCEDURES.

CTAF - AFRU 127.2

ADDITIONAL INFORMATION

1. Blasting 0.2NM south FM ARP. Contact ARO for blasting times.
2. Secondary WDI 180M N of RWY 11 THR.

CHARTS RELATED TO THE AERODROME

1. WAC 3223.
 2. Also refer to AIP Departure and Approach Procedures.
-