

DUBBO**ELEV 935****AVFAX CODE 2215**

NSW

UTC +10

YSDU

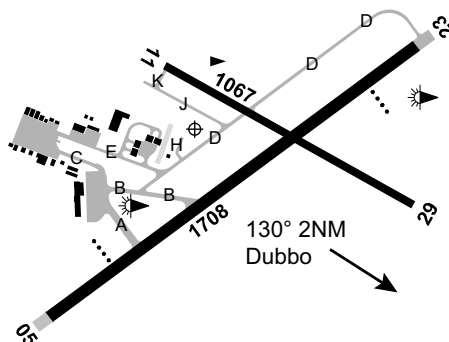
321300S

1483429E

VAR 11 DEG E

CERT

AD OPR Dubbo Regional Council, PO Box 81, Dubbo, NSW, 2830. PH 02 6801 4000. ARO 0417 717 871. Website: www.dubbo.nsw.gov.au.

**REMARKS**

1. AD Charges: All ACFT - \$14.00/tonne pro rata.
2. This AD is a Security Controlled Airport.
3. PN for PJE required in writing, 30 days prior to date.
4. PRKG fees apply to all ACFT on sealed APN after 48HR, INFO AVBL FM AD OPR.
5. Hi-visibility reflective vest (or equivalent) must be worn when operating airside.

HANDLING SERVICES AND FACILITIES

AIR BP - Nicholls Aviation: H24 0419 767 200, 45MIN PN, call-out fee. JET A1 AIR BP Carnet. VIVA Energy Aviation. 24HR 7 Days 0700-1700. AVGAS and JET A1 tankers, AH 45MIN PN. Mobile 0407 708 066, Fax 02 6882 7522, 24HR AVGAS Card Swipe Bowser. VIVA Fuel2Sky fuel card and credit cards (V and MC).

PASSENGER FACILITIES

HC/PT/LG/RF PH 0403 227 827 AVBL 0530-2030 Local DLY. WC/TX H24.

APRONS AND TAXIWAYS

1. TWY C, D, E, J, K and GA aprons not AVBL to ACFT ABV 8,000KG MTOW.
2. TWY H not AVBL to ACFT ABV 5,700KG MTOW.
3. TWY A WID 23 Code C. AVBL to ACFT up to Code C.
4. TWY B AVBL to Code C ACFT. TWY B not AVBL to ACFT ABV 20,000KG MTOW. ACFT ABV 20,000KG to use TWY A.

AERODROME OBSTACLES

1. Pole 979FT AMSL 2,338M FM SOT RWY 23, 156M N of CL. Infringes TKOF SFC.
2. Groups of trees:
 - a. 1,047FT AMSL 3,113M FM SOT RWY 23, 74M S of CL. Infringes TKOF SFC.
 - b. 1,046FT AMSL 3,126M FM SOT RWY 23, 52M S of CL. Infringes TKOF SFC.
 - c. 1,015FT AMSL 2,670M FM SOT RWY 23, 96M S of CL. Infringes TKOF SFC.
3. Communication towers (lit):
 - a. 1,125FT AMSL 1,751M FM SOT RWY 11, 1,913M S of CL. Infringes inner horizontal SFC.
 - b. 1,141FT AMSL 1,682M FM SOT RWY 11, 2,014M S of CL. Infringes inner horizontal SFC.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT B, METAR/SPECI.
2. AWIS PH 02 9353 6419 - Report faults to BoM.
3. AWIS FREQ 122.975 (requires one-second pulse to activate) - Report faults to AD OPR.

PHYSICAL CHARACTERISTICS

05/23	043	56a	PCN 19/F/C/1.10 MPa/T	WID 45	RWS 150
11/29	108	35a	8000 kg/0.60 MPa Sealed	WID 18	RWS 90

RWY 05/23 - Sealed blast areas 60 X 45 at ends.

AERODROME AND APPROACH LIGHTING

RWY 05/23	LIRL	PAL 121.3	SDBY PWR AVBL
RWY 05/23	PAPI(1)	PAL 121.3	3.0 DEG46FT SDBY PWR AVBL

(1) Left side.
RWY edge light spacing: 05/23: 60M.

OTHER LIGHTING

1. SDBY PWR switchover time: 9 SEC.
2. TWY LGT: Blue edge on A and B.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA MELBOURNE CENTRE 123.9 On Ground

RADIO NAVIGATION AND LANDING AIDS

NDB DU 251 321303.1S 1483332.7E Range 90 (HN 70) (1)
(1) 075/0.9 to ARP

LOCAL TRAFFIC REGULATIONS

1. All ACFT must takeoff and land using sealed RWY only unless approved by AD OPR with PN required.
2. Grass PRKG AVBL for ACFT BLW 8,000KG MTOW BTN TWY C and E AVBL via TWY E only.
3. PRKG:
 - a. Position 4 restricted to Code B ACFT or below. Parking restricted to 1HR only.
 - b. Position 1 and 1A restricted to Code B ACFT or below. Parking restricted to RPT ACFT only.
 - c. Position 2 and 3 restricted to Code C ACFT or below. Parking restricted to RPT ACFT only.
4. Due to RWY levels and obstructions, ACFT may not be sighted or heard via CTAF when on other runway ends.

CTAF - AFRU 134.0

ADDITIONAL INFORMATION

1. Bird and animal hazard (kangaroos and wallabies) exists.
2. All pilots and operators must possess and display a current Australian Security Identification Card (ASIC) when airside.

CHARTS RELATED TO THE AERODROME

1. WAC 3456, 3457.
2. Also refer to AIP Departure and Approach Procedures.